


PUMPEN

Alle Pumpen werden mit Druckregler
von 0 - max. Druck geliefert
Manometer gefüllt mit Glyzerine
Anschlußtülle für Ansaug- und Rücklaufschlauch

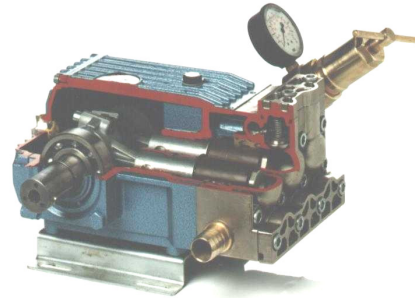

PLUNGERPUMPEN

Artikel Nr.	Type	Leistung				benötigte	
		L/min	max. Druck	Antrieb	KW	U/min	
50.015.050	P11	15	- 45	- M	1,8	1420	
50.015.055	WS151	15	- 55	- M	2,2	1420	
50.015.101	WS151	15	- 100	- M	3,0	1420	
50.015.151	WS151	15	- 150	- M	4,0	1450	
50.015.200	WS201	15	- 200	- M	5,5	1450	
50.021.055	WS102	21	- 55	- M	3,0	1450	
50.021.100	WS102	21	- 100	- M	4,0	1450	
50.021.130	WS202	21	- 130	- M	5,5	1450	
50.021.200	WS202	21	- 200	- M	7,5	1450	
50.036.050	GC50	36	- 50	- M	4,0	1050	
50.036.122	GC50	36	- 120	- M	7,5	1050	
50.036.150	P30	36	- 150	- M	11,0	1420	
50.037.055 *	T55	37	- 55	- M/A	4,0	480	
50.043.130	P30	43	- 130	- M	11,0	1420	
50.048.180	P41	48	- 180	- M	17,9	1450	
50.050.050 *	T55	50	- 50	- M/A	5,5	650	
50.050.120	NP25	50	- 120	- M	11,0	1450	
50.055.055 *	T88	55	- 55	- M/A	5,5	420	
50.058.110	P41	58	- 110	- M	13,1	1100	
50.070.040 *	T88	70	- 40	- M/A	5,5	540	
50.085.045 *	T88	85	- 45	- M/A	7,5	650	
50.085.061	T88	85	- 60	- M/A	11,0	650	
50.094.110	P50	94	- 110	- M	20,5	800	
50.120.060 *	CK120	120	- 50	- M/A	11,0	550	
50.170.060 *	T177	170	- 60	- M/A	22,0	650	

MEMBRANPUMPEN

50.930.040*	PA330	30	- 40	- M	3,0	540
50.930.041*	PA330	30	- 40	- A	3,0	540
50.935.140**	AR30	35	- 40	- M	4,0	540
50.940.140**	AR50	40	- 40	- M	4,0	460
50.950.040*	PA530	50	- 40	- M	5,5	540
50.950.041*	PA530	50	- 40	- A	5,5	540
50.970.045*	PA730	70	- 45	- M	7,5	540
50.990.045*	PA908	90	- 45	- M	7,5	540

* Pumpenkopf aus Aluminium

** Pumpe beschichtet, Ventile und Ventilsitze in Edelstahl

M = Motorantrieb

A = Zapfwellenantrieb 1 3/8"